




NTN Bearing Driveshaft do Brasil

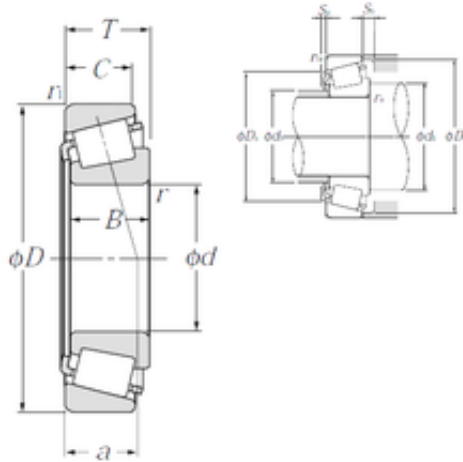

30 mm x 72 mm x 27 mm NTN 4T-32306CR
Single row tapered roller bearings

Bearing No. 4T-32306CR

4T-32306CR Bearing 2D drawings and 3D CAD models

Size	30x72x28.75 mm
Bore Diameter	30 mm
Outer Diameter	72 mm
Width	28,75 mm
d	30 mm
D	72 mm
T	28,75 mm
B	27 mm
C	23 mm
ra1 max.	1,5 mm
a	23 mm
r min.	1,5 mm
r1 min.	1,5 mm
da min.	38,5 mm
Da min	57 mm
Da max.	63,5 mm
db max.	37 mm
Db min.	67,5 mm
ra max.	1,5 mm
Sa	2 mm
Sb	5,5 mm
Weight	0,594 Kg
Basic dynamic load rating (C)	70 kN
Basic static load rating (C0)	88,5 kN
(Grease) Lubrication Speed	5 500 r/min



NTN Bearing Driveshaft do Brasil

(Oil) Lubrication Speed	7 300 r/min
Calculation factor (e)	0,61
Calculation factor (Y0)	0,54
rs min	1.5 mm
r1s min	1.5 mm
e	0.61
Y2	0.99
Y0	0.54
Mass	0.59 kg
ISO 355 reference	T2FD030
Dynamic load, C	70 kN
Rating life coefficient, A2	1.4
Static load, C0	88.5 kN
Fatigue limit load, Cu	10.8 kN
Nlim (oil)	7,300 rpm
Nlim (grease)	5,500 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
da max	38.5 mm
db min	37 mm
Da max	63.5 mm
Db min	67.5 mm
ra max	1.5 mm
r1a max	1.5 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.591
Product Group	B04334