




## NTN Bearing Driveshaft do Brasil

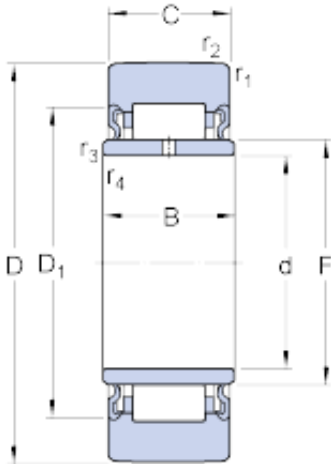

15 mm x 35 mm x 14 mm 15 mm x 35 mm x 14 mm skf NA 2202.2RS Support rollers without flange rings with an inner ring

Bearing No. NA 2202.2RS

NA 2202.2RS Bearing 2D drawings and 3D CAD models

Size	15x35x13.8 mm
Bore Diameter	15 mm
Outer Diameter	35 mm
Width	13,8 mm
D	35 mm
d	15 mm
C	13.8 mm
B	14 mm
D <sub>1</sub>	26 mm
F	20 mm
r <sub>1,2</sub> - min.	0.6 mm
r <sub>3,4</sub> - min.	0.3 mm
Basic dynamic load rating - C	7.5 kN
Basic static load rating - C <sub>0</sub>	9.3 kN
Fatigue load limit - P <sub>u</sub>	1.1 kN
Maximum dynamic radial loads - F <sub>r</sub>	9.5 kN
Maximum static radial loads - F <sub>0r</sub>	13.7 kN
Limiting speed	5000 r/min
Category	Cam Follower and Track Roller - Yoke Type
Inventory	0.0
Manufacturer Name	SKF



## NTN Bearing Driveshaft do Brasil

Minimum Buy Quantity	N/A
Weight / Kilogram	0.081
EAN	7316577011930
Product Group	B04144
Roller Surface Profile	Crowned
Profile	Yoke Type
Enclosure	Sealed
Rolling Element	Needle Bearing
Relubricatable	Yes
Inch - Metric	Metric
Other Features	Caged   With Inner Ring   Lip Seal
Long Description	15MM Bore; 35MM Roller Diameter; 13.8MM Roller Width; Crowned Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Category	Cam Followers Yoke Type
UNSPSC	31171530
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Cam Follower
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	NA 2202.2RS
Weight / LBS	0.165
Roller Diameter	1.378 Inch   35 Millimeter
Roller Width	0.543 Inch   13.8 Millimeter
Bore	0.591 Inch   15 Millimeter
roller diameter:	35 mm
radial static load capacity:	13.7 kN
roller width:	13.8 mm
roller material:	Chrome Steel
bore diameter:	15 mm
maximum rpm:	5000 RPM



## NTN Bearing Driveshaft do Brasil

roller shape:	Crowned
lubrication hole location:	Inner Ring
bearing element:	Needle Rollers
axial dynamic load capacity:	7.21 kN
closure type:	Sealed
axial static load capacity:	9 kN
operating temperature range:	Maximum of +280 ° F
finish/coating:	Uncoated
radial dynamic load capacity:	9.65 kN
standards met:	ANSI/ABMA Standard 18.1
$D_1$	26 mm
$r_{1,2}$ min.	0.6 mm
$r_{3,4}$ min.	0.3 mm
Basic dynamic load rating C	7.48 kN
Basic static load rating $C_0$	9.3 kN
Fatigue load limit $P_u$	1.12 kN
Maximum dynamic radial load $F_r$ max.	9.5 kN
Maximum static radial load $F_{0r}$ max.	13.7 kN
Mass support roller	0.075 kg