




NTN Bearing Driveshaft do Brasil

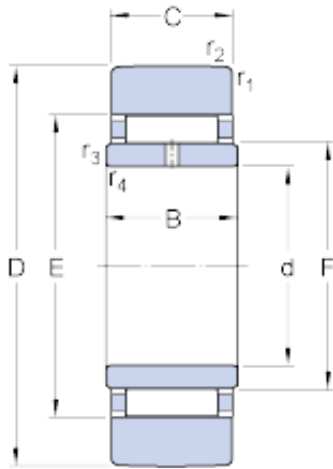

15 mm x 35 mm x 12 mm 15 mm x 35 mm x 12 mm skf STO 15 Support rollers without flange rings with an inner ring

Bearing No. STO 15

STO 15 Bearing 2D drawings and 3D CAD models

| | |
|--|---------------|
| Size | 15x35x11.8 mm |
| Bore Diameter | 15 mm |
| Outer Diameter | 35 mm |
| Width | 11,8 mm |
| D | 35 mm |
| d | 15 mm |
| C | 11.8 mm |
| B | 12 mm |
| E | 26 mm |
| F | 20 mm |
| $r_{1,2}$ - min. | 0.3 mm |
| $r_{3,4}$ - min. | 0.3 mm |
| Basic dynamic load rating - C | 9.1 kN |
| Basic static load rating - C_0 | 10.6 kN |
| Fatigue load limit - P_u | 1.3 kN |
| Maximum dynamic radial loads - F_r | 7.1 kN |
| Maximum static radial loads - F_{0r} | 10 kN |
| Limiting speed | 5000 r/min |
| Category | Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |



NTN Bearing Driveshaft do Brasil

| | |
|--|----------|
| Weight / Kilogram | 0.063 |
| Product Group | B04120 |
| $r_{1,2}$ min. | 0.3 mm |
| $r_{3,4}$ min. | 0.3 mm |
| Basic dynamic load rating C | 9.13 kN |
| Basic static load rating C_0 | 10.6 kN |
| Fatigue load limit P_u | 1.27 kN |
| Maximum dynamic radial load F_r max. | 7.1 kN |
| Maximum static radial load F_{0r} max. | 10 kN |
| Mass support roller | 0.063 kg |