




NTN Bearing Driveshaft do Brasil

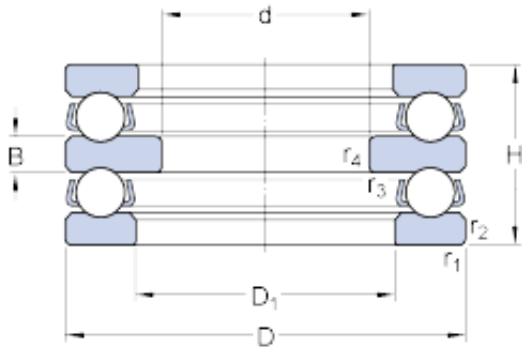

15 mm x 40 mm x 6 mm skf 52204 Thrust ball bearings, double direction

Bearing No. 52204

52204 Bearing 2D drawings and 3D CAD models

Size	40x15x26 mm
Bore Diameter	40 mm
Outer Diameter	15 mm
Width	26 mm
d	15 mm
D	40 mm
H	26 mm
D ₁	22 mm
B	6 mm
r _{1,2} - min.	0.6 mm
r _{3,4} - min.	0.3 mm
d _a	20 mm
D _a - max.	28 mm
r _a - max.	0.6 mm
r _b - max.	0.3 mm
Basic dynamic load rating - C	21.2 kN
Basic static load rating - C ₀	37.5 kN
Fatigue load limit - P _u	1.4 kN
Reference speed	4300 r/min
Limiting speed	6000 r/min
Minimum load factor - A	0.0085
Category	Thrust Ball Bearing
Inventory	0.0
Manufacturer Name	SKF



NTN Bearing Driveshaft do Brasil

Minimum Buy Quantity	N/A
Weight / Kilogram	0.159
EAN	7316577007100
Product Group	B00308
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Double Direction
Banded	No
Cage Material	Steel
Precision Class	ABEC 1 ISO P0
Component Description	Roller Assembly Plus Raceways
Other Features	Double Row
Long Description	15MM Bore 1; 22MM Bore 2; 40MM Outside Diameter; 26MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171507
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	52204
Weight / LBS	0.351
Outside Diameter	1.575 Inch 40 Millimeter
Height	1.024 Inch 26 Millimeter
Bore 2	0.866 Inch 22 Millimeter
Bore 1	0.591 Inch 15 Millimeter
Overall Height with Aligning Washer	0 Inch 0 Millimeter



NTN Bearing Driveshaft do Brasil

bore diameter:	15 mm
static load capacity:	37.5 kN
outside diameter:	40 mm
dynamic load capacity:	21.2 kN
overall width:	26 mm
maximum rpm:	6000 RPM
thrust bearing type:	Double-Direction
cage material:	Steel
outside diameter design:	Straight
fillet radius:	0.3 mm
separable or banded:	Separable
series:	522
precision rating:	ABEC 1 (ISO Class Normal)
D_1	22 mm
$r_{1,2}$ min.	0.6 mm
$r_{3,4}$ min.	0.3 mm
d_a	20 mm
D_a max.	28 mm
r_a max.	0.6 mm
r_b max.	0.3 mm
Basic dynamic load rating C	21.2 kN
Basic static load rating C_0	37.5 kN
Fatigue load limit P_u	1.4 kN
Minimum load factor A	0.0085
Mass bearing (including seat washer where applicable)	0.15 kg