




NTN Bearing Driveshaft do Brasil

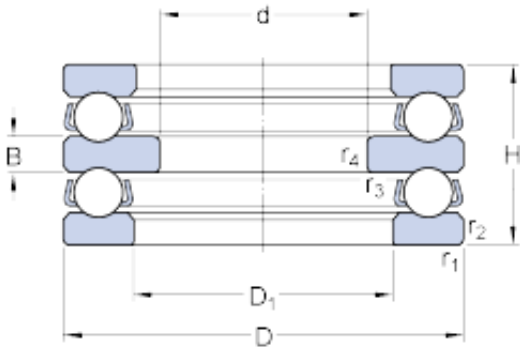

30 mm x 90 mm x 15 mm skf 52408 Thrust ball bearings, double direction

Bearing No. 52408

52408 Bearing 2D drawings and 3D CAD models

| | |
|---|---------------------|
| Size | 90x30x65 mm |
| Bore Diameter | 90 mm |
| Outer Diameter | 30 mm |
| Width | 65 mm |
| d | 30 mm |
| D | 90 mm |
| H | 65 mm |
| D ₁ | 42 mm |
| B | 15 mm |
| r _{1,2} - min. | 1.1 mm |
| r _{3,4} - min. | 0.6 mm |
| d _a | 40 mm |
| D _a - max. | 60 mm |
| r _a - max. | 1 mm |
| r _b - max. | 0.6 mm |
| Basic dynamic load rating - C | 95.6 kN |
| Basic static load rating - C ₀ | 183 kN |
| Fatigue load limit - P _u | 6.8 kN |
| Reference speed | 1800 r/min |
| Limiting speed | 2400 r/min |
| Minimum load factor - A | 0.26 |
| Category | Thrust Ball Bearing |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| | |



NTN Bearing Driveshaft do Brasil

| | |
|-------------------------------------|---|
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0 |
| EAN | 7316570246827 |
| Product Group | B00308 |
| Rolling Element | Ball Bearing |
| Thrust Bearing | Yes |
| Single or Double Direction | Double Direction |
| Banded | No |
| Cage Material | Steel |
| Precision Class | ABEC 1 ISO P0 |
| Component Description | Roller Assembly Plus Raceways |
| Other Features | Double Row With Flat Seat |
| Long Description | 30MM Bore 1; 42MM Bore 2; 90MM Outside Diameter; 65MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; ABEC 1 ISO P0 Precision |
| Inch - Metric | Metric |
| Category | Thrust Ball Bearings |
| UNSPSC | 31171552 |
| Harmonized Tariff Code | 8482.10.50.08 |
| Noun | Bearing |
| Keyword String | Ball Thrust |
| Manufacturer URL | http://www.skf.com |
| Weight / LBS | 4.51948 |
| Outside Diameter | 3.543 Inch 90 Millimeter |
| Overall Height with Aligning Washer | 0 Inch 0 Millimeter |
| Bore 1 | 1.181 Inch 30 Millimeter |
| Bore 2 | 1.654 Inch 42 Millimeter |
| Height | 2.559 Inch 65 Millimeter |
| D ₁ | 42 mm |
| | |



NTN Bearing Driveshaft do Brasil

| | |
|---|---------|
| $r_{1,2}$ min. | 1.1 mm |
| $r_{3,4}$ min. | 0.6 mm |
| d_a | 40 mm |
| D_a max. | 60 mm |
| r_a max. | 1 mm |
| r_b max. | 0.6 mm |
| Basic dynamic load rating C | 95.6 kN |
| Basic static load rating C_0 | 183 kN |
| Fatigue load limit P_u | 6.8 kN |
| Minimum load factor A | 0.26 |
| Mass bearing (including seat washer where applicable) | 2.05 kg |